


Siflex AG gloss value

Single or double sided etching with various gloss values

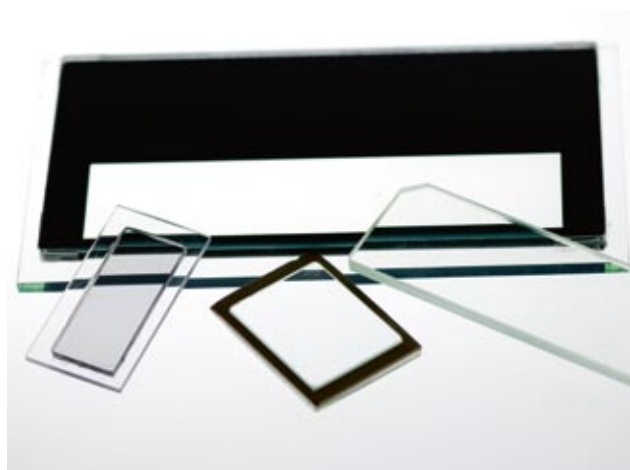

Wherever antireflective coated glass is used and severe demand on the surface can be expected, **Siflex AG gloss value** impresses with its optimum characteristics.

In contrast to optical coatings, with **Siflex AG gloss value** the antireflective properties are obtained by a single or double sided etching of the surface.

Because of this, this high quality special glass is ideal for use in touch screens (e.g. in ATMs, games consoles, etc.).

Siflex AG gloss value is easy to clean, pleasant to touch and is completely robust.

According to the application, it is available in various gloss values and with a full range of processing, e.g. edge processed, as single layer safety glass, chemically treated and/or as laminated safety glass with organic and/or ceramic screen printing.

Technical data

Available gloss values: 20°, 40°, 60°, 80°, 100° 120°

Measuring method: Micro-Tri-Gloss Gardner, 20° according to European Standard

Available thicknesses: 1.1 - 6.0 mm (±0,2) (monolithic)
