


# Sitec

## Conductive Glass

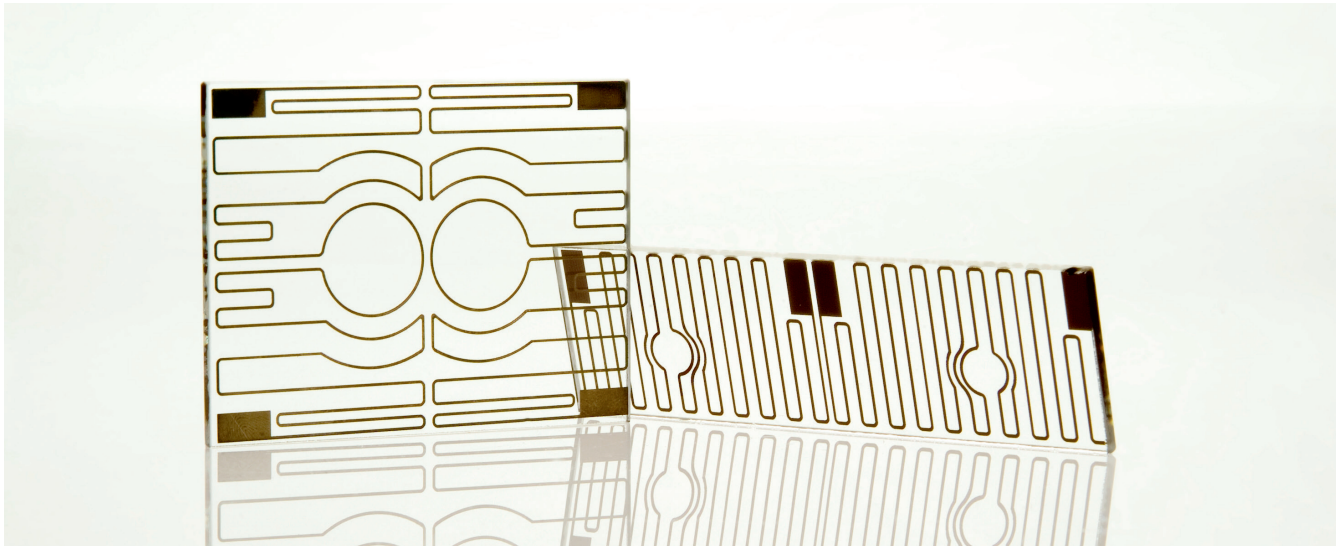

**Sitec** can be used wherever conductive, transparent glass is required for heating glazing and protecting against HF radiation.

This single layer ITO or pyrolytically coated glass is suitable as a front panel for demanding applications for data displays and monitor screens.

**Sitec** is also available as single layer safety glass with ceramic or organic screen printing, minimum glass thickness 3 mm.

If required, all Sitec glasses are available with contacting.

### Technical data

Thickness tolerances:	±0,2
-----------------------	------

Conductivity:	≤ 20 Ohm/Square (defined, smaller electric resistance value on request)
---------------	---

Basis material:	Float glass
-----------------	-------------

Thicknesses:	1,0–6,0 mm
--------------	------------

Transmission:	approx. 80 %
---------------	--------------